


SOTTILE 40
48V TRACK LIGHTING

made in
HOLLAND


AVAILABLE IN

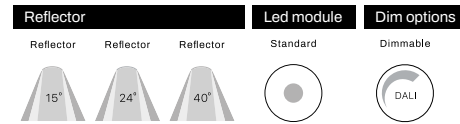

Lumen output	910lm
CRI	>90Ra
CCT	2700K • 3000K

FIXTURE SPECIFICATIONS

 [View product on website](#)



Fixture weight: 162 grams



Housing material	Die cast aluminium
Material finish	Powder coating
RAL colour	9005 (Black) • 9016 (White) • 1036 (Gold)
Fixture type	48V low voltage track light
LED Module	Bridgelux V6 HD LED
Driver	Powergear 48V in-track adapter
Number of light sources	1
Adjustability	350° rotatable and 90° tiltable
IP rating	IP20
Expected lifetime	L90 / B10 @ 70.000 hours
Photobiological safety	RG1 Unlimited
Power factor	> 0.9
Colour consistency	3 SDCM
Warranty	3 years on LED module and driver

FIXTURE VARIATIONS

LED module	Lumen	Light colour	Efficiency (Lm/W)	Power	Dim options
Bridgelux V6 HD LED	910lm	927	70	13.0 W	DALI
Bridgelux V6 HD LED	910lm	930	70	13.0 W	DALI

Fixture variations:

- ¹⁾ Lumen output of LED module (COB) is displayed as net lumen and is subject to 10% tolerance of real time light output (set by international standards)
- ²⁾ Colour temperature notation is composed of CRI value, indicated by the first digit, and CCT in Kelvin, indicated by the following 2 digits. Accuracy of the Correlated Colour Temperature (CCT) is subject to a tolerance of up to +/- 150 Kelvin compared to nominal value.
- ³⁾ Fixture efficiency is displayed in lumens per watt and is calculated based on the gross lumen output and power consumption of both the LED module and driver
- ⁴⁾ Mentioned wattage applies for the total power consumption of the fixture, including both LED module and driver.

Technical data can be changed by Internova Professional Lighting without prior notice.

ARTICLE CODE CONFIGURATOR

IN

LUMEN OUTPUT

⦿
670lm

LIGHT COLOUR

REFLECTOR

FIXTURE COLOUR

DIM OPTIONS

Article code configurator:

- ¹⁾ This configurator may not be compatible with all PDF readers. For an optimal experience, please open this document using Google Chrome

POLAR DIAGRAMS

