SINCE 1978

LEADING LIGHT

# Product Datasheet

vkleadinglight.gr

Bloc

## VK/04262/B/W

Recessed spot led, 2W, 3000K, 180lm, 15°, IP20, black

IP20

| Dimensions | Gallery | Downloads |
|---|---|---|
|  |   | FILES<br>FOTO<br>CE |





VK Leading Light

Since 1978

| Technical Specifications | |
|---|---|
| Kelvin | 3000K |
| Power | 2W |
| Voltage | 100-240V |
| Extra | With honeycomb |
| Fitting | Recessed dark ceiling |
| Type | Downlight LED |
| Safety class | |
| Light source | OSRAM |
| IP Rating | IP20 |
| CRI | CRI>90 |
| Dimmable | |
| Lifetime | 50.000hrs |
| Clicks | 20.000clicks |
| Working temperature | < 45°C |
| PAGE | 211 Technical 2024 |
| NICKNAME | Bloc |

| Physical Specifications | |
|---|---|
| Recessed ceiling | Yes |
| Color | Black |
| Material | Aluminium |
| Width | ø4.1cm |
| Length | ø4.1cm |
| Height | 3.8cm |
| Net weight of product (kg) | 0.08 |
| Gross weight with inner box (kg) | 0.10 |
| Gross weight with master box (kg) | 5.17 |
| Cut out | ø3.5cm depth 3.5cm |

VK Leading Light
Since 1978

| Illumination Data | |
|---|---|
| Lumen | 180lm |
| Beam angle | 15° |
| Lighting direction |  |
| Dark light | Yes |

| Packing Info | |
|---|---|
| Pcs/carton | 50pcs |

| Certification & Warranty | |
|---|---|
| Guarantee | 3 years |
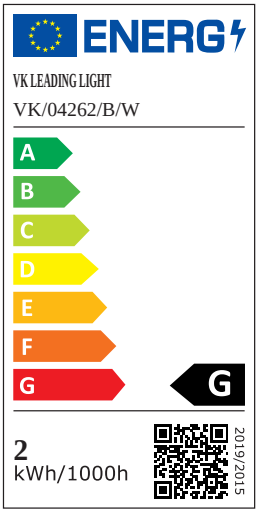
## Energy Label