


# Noa 100 Top

LL133051D2

**Lombardo.**



## Technical information:

Installation:	Ceiling, Surface mounting ceiling
Material:	Aluminium
Finish:	Corten
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Optics:	Diff.
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	16
Lumen:	1750
Real Lumen:	1200
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK EA
Dimming	Phase cut

Optic D not available for Honeycomb version.



# Noa 100 Top

LL133051D2

Lombardo.




# Noa 100 Top

LL133051D2

Lombardo.

## Lighting simulation:

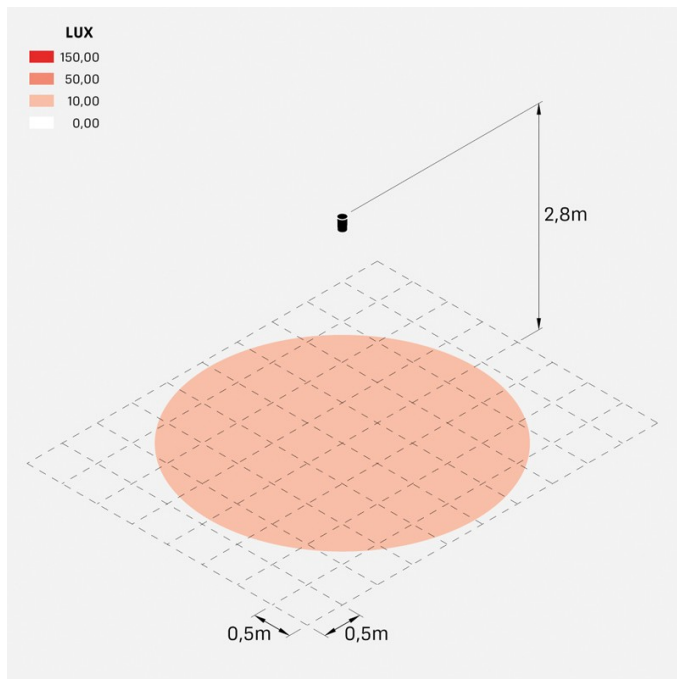

noa\_100\_top\_optic\_d