



IK06 IP65

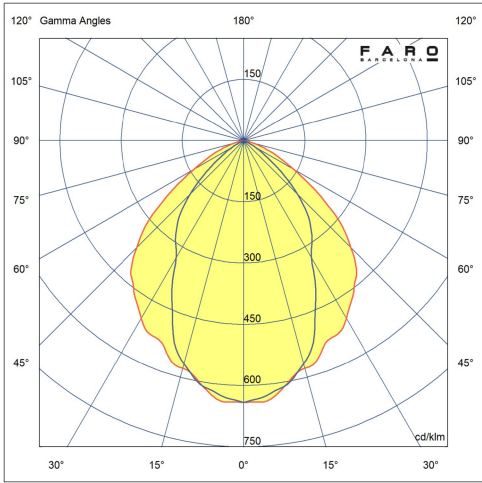

Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	8
Energy class light source	E
Light source	SMD LED
Light source included	Yes
Power factor	0.9
Luminous Flux (lm)	813/870/896
Color temperature (K)	2700/ 3000/ 4000K
CRI	≥80
Suitable for seaside areas	No
Driver included	Yes
Supply current	200 mA
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Black
Diffuser finish	Prism
Included Accessory	KIT DE FIJACION
Installation instructions	
Energy label	
Photometric	

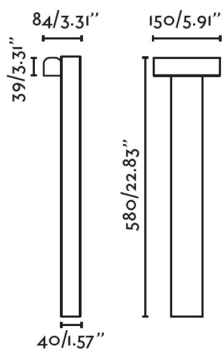