

IK06 IP65




44/1.7" 45/1.8"
600/23.62"

Mounting	Wall
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	I
IP	65
IK	06
Power (W)	6
Energy class light source	E
Light source	SMD LED
Light source included	Yes
Power factor	0.96
Luminous Flux (lm)	479/500/531
Color temperature (K)	2700/ 3000/ 4000K
Dimmable luminaire (W)	Yes
Light orientation	Indirect lighting
CRI	90
Suitable for seaside areas	No
Control System	TRIAC
Driver included	Yes
Structure material	Aluminium
Diffuser material	PMMA
Structure finish	Black
Diffuser finish	Translucent

Installation instructions

Energy label

Photometric

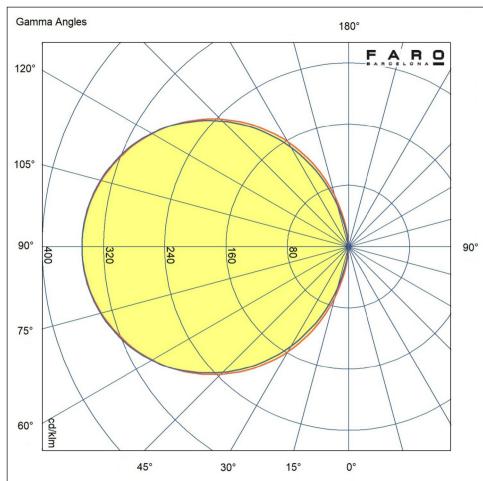

Document generated on 04/02/2026



Document generated on 04/02/2026