


Mounting	Floor
Voltage (V)	24VDC
Class	III
IP	65
IK	06
Power (W)	3
Energy class light source	G
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	154
Color temperature (K)	2700K
Dimmable luminaire (W)	No
CRI	>90
Suitable for seaside areas	No
Driver included	No
Recommended driver On/Off	98324031
Luminaires per On/Off driver	De 1 a 10
Recommended DALI driver	98324101
Luminaires per DALI driver	De 1 a 25
Recommended CASAMBI driver	98324599
Luminaires per CASAMBI driver	De 1 a 30
Cable length	500 mm
Structure material	Stainless Steel
Diffuser material	Glass
Structure finish	Black
Diffuser finish	Opal


Installation instructions

Energy label

Photometric

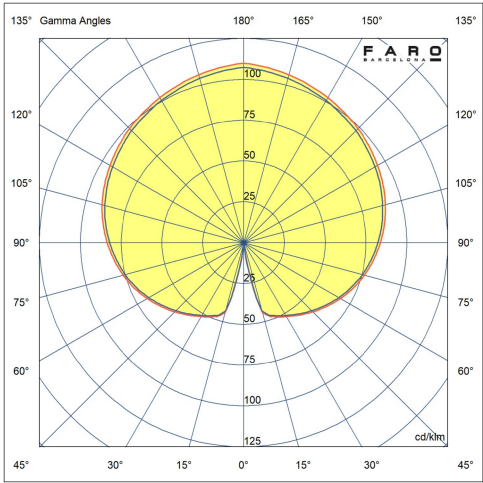

Recommended Drivers

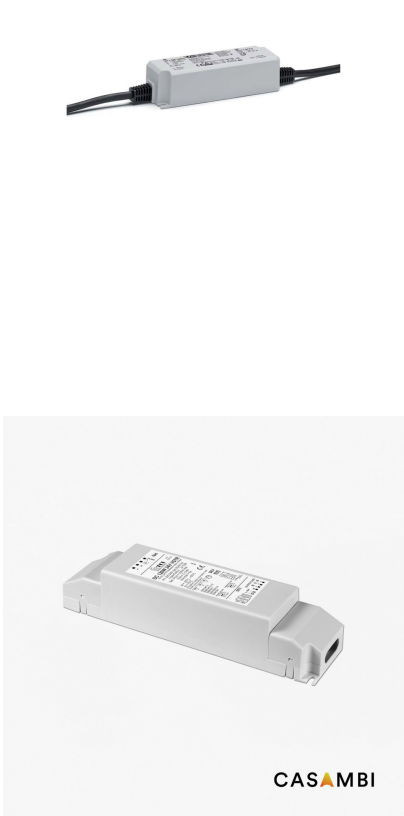

SOURCE D’ALIMENTACION 24VDC 30W IP67

Reference	98324031
Voltage (V)	24VDC
IP	67
Power (W)	30
Control System	on/off

24Vdc 100W IP67 DALI power supply

Reference	98324101
Voltage (V)	100V-240V
Control System	Dali

POWER SUPPLY 24VDC 120W 5A Casambi

Reference	98324599
Voltage (V)	24VDC
IP	20
Power (W)	120
Control System	Casambi